

CSL24



24YD Self-Loading, Self-Contained Compactor




CURBTENDER
DISPOSAL SYSTEMS

701 PERFORMANCE DRIVE | CEDAR FALLS, IA 50613

PHONE: 319.266.1721 | FAX: 319.266.8207

2022 Curbtender Inc., All Rights Reserved. Specifications subject to change.

Curbtender Sweepers LLC d/b/a Curbtender Disposal Systems

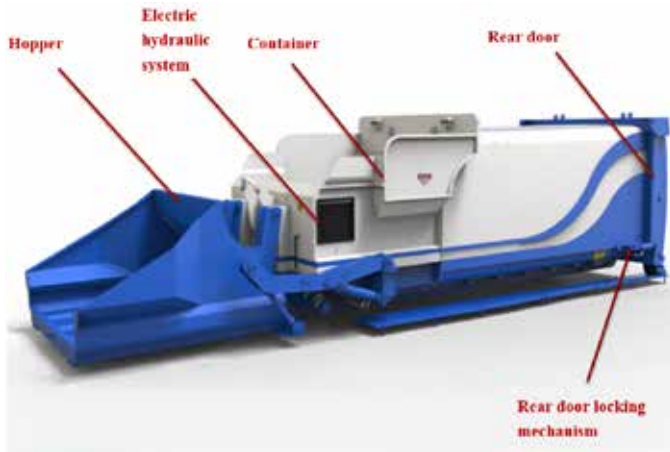

SPECIFICATIONS

Container Volume	24yd ³
External Dimensions L" x W" x H"	Hooklift: 258" x 98.5" x 97" (In Transportation) Roll off: 272" x 98.5" x 97" (In Transportation)
External Dimensions L" x W" x H"	364" x 98.5" x 168" (In Operation) (H=Top of Hopper Arc of Travel)
Height of Hook Center	61.75"
External Width of Container Rails	41.7"
Total Weight	13,000 LBS.

Features

- Standard Gasoline Powered Auxiliary Motor Allows this Self-Contained, Self-Loading Compactor to be Dropped and Used Anywhere.
- Unit is Built Like a Front Loading Refuse Truck Providing Heavy Duty Compaction.
- Oversized Dust Pan Allows Collection of Bulky Materials and an Easy Dumping Process Into the Hopper.
- Dust Pan Serves as a Hopper Cover, Fully Enclosing the Machine When Not in Use.
- Does Not Need to be Mounted to a Facility (Eliminates Costly Installation as Well as Safety Issues and Health Issues).
- Provides Waste Security for Waste Streams Requiring Close Monitoring and Protection.
- Uniquely Suited for Wet Waste, Bio Waste, and Agricultural Wastes.

Compactor

- Width x Height of Pack Panel: 76.6" x 18.9"
- Effective Working Volume of Compaction Compartment: 4.7yd³
- Net Lifting Weight of Tipping Mechanism: 3,000 LBS.
- Theoretical Throughput: 19 (t/h)
- Max. Compaction Force: 65,000 LBS.
- Estimated Density After Compaction: 950 LBS./yd³

Debris Hopper

- Hopper Volume: 5.9yd³
- Internal Width x Length of Hopper: 90.5" x 102"

Power Supply

- Power Supply Options: 240V Single Phase, Low or High Voltage Three-Phase
- Motor Power: 10 HP

Hydraulics

- Rated System Pressure: 1800 PSI